

ISOMEK

SANDWICH PANELS



LAM 5G

**A1**

Le caratteristiche principali della lamiera grecata Isomec sono quelle di essere robusta, facile da tagliare, resistente e di lunga durata. Il profilo moderno a 5 greche è adatto per svariate applicazioni per il rivestimento di coperture e pareti di edifici commerciali, industriali e residenziali. Estrema facilità di montaggio e rapidità di esecuzione. Costi di manutenzione ridotti

Si consiglia una lunghezza massima dei pannelli non superiore a 6000 mm.

The main features of Isomec corrugated sheet are its toughness, the fact that it is easy to cut, its resistance and longevity. The modern profile with 5 corrugations is suitable for a wide range of applications for covering the roofs and walls of commercial, industrial and residential buildings. Extremely easy to assemble and quick to lay. Low maintenance costs.


We recommend the panel length does not exceed 6000mm.





Micronervature

Profile types

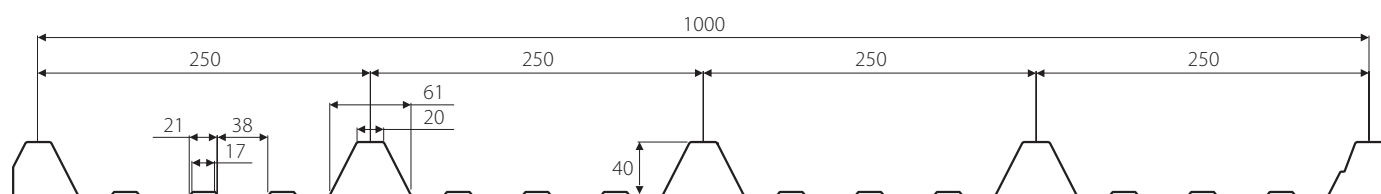

Sp. (mm)	0,5	0,6	0,7	0,8
J (cm ⁴ /m)	10,00	12,05	13,85	15,75
W (cm ³ /m)	4,75	5,80	6,70	7,75

LAM 5G	Standard	A richiesta – On demand
Finiture esterne - External finishing	5G	---
Superfici esterne External surface	Acciaio-Steel EN10346/Inox EN10088 Alluminio-Aluminium EN485	Granite-Color Farm/Plastisol/Aluzinc HDX/Z150 -200 -275 - PET - PVDF - PVC

Proprietà meccaniche Acciaio, Tolleranze dimensionali EN14509 - Mechanical Properties: Steel, Dimensional tolerances EN 14509

Sp. (mm)	Peso Weight (kg/m ²)	Sp. (mm)	L (m)	L					L				
				1,00	1,50	2,00	2,50	3,00	1,00	1,50	2,00	2,50	3,00
0,5	4,90	0,5	Portata Max Load P=kg/m ²	460	200	115			560	240	130	80	
0,6	5,90	0,6		560	245	130	70		680	300	165	100	65
0,7	6,90	0,7		660	290	150	80		850	375	200	130	80
0,8	7,90	0,8		760	340	180	90	55	1000	445	245	150	100

I dati riportati sono puramente indicativi. Rimane responsabilità del progettista, in fase di calcolo, effettuare le verifiche necessarie. Per maggiori informazioni contattare Isomec.
 Technical data are to be considered as purely indicative. They can not replace the project calculation made by a qualified technician who will apply the rules in force in the referring market. More info, please contact: Isomec.



Contacts

Contatti

Finance - Management

Amministrazione

Viale del lavoro 19, Z.I. Paludi

32016 Alpago (BL)

Ph. +39 0437 989105

Fax +39 0437 989198

www.isomec.it

Sales - Logistics

Uffici - Commerciali - Logistica

Viale del lavoro 19, Z.I. Paludi

32016 Alpago (BL)

Ph. +39 0437 989105

Fax +39 0437 989198

www.isomec.it

Production and registered office

Produzione e sede legale

Viale del lavoro 31, Z.I. Paludi

32016 Alpago (BL)

Ph. +39 0437 989206

Fax +39 0437 982084

www.isomec.it

Mail:

Information - Informazioni:

isomec@isomec.it

Finance - Amministrazione:

amministrazione@isomec.it

Accounting - Contabilità:

contabile@isomec.it

Sales - Vendite:

commerciale@isomec.it

Logistics - Logistica:

spedizioni@isomec.it

Production - Produzione:

produzione@isomec.it